

HMM MAINE HAMILTON MARINE

800-639-2715
hamiltonmarine.com

SPECIAL! BEST DEALS ON ROPE!

3-Strand Nylon

High-tenacity white nylon multifilament fiber. Four-stage construction produces a torque-balanced rope with medium lay. Meets or exceeds Cordage Institute, US and Canadian Military standards.



600 ft Spools

| Size | Order# | Tensile Strength | Ft Price per Reel | 600' Reel |
|--------|--------|------------------|-------------------|-----------|
| 3/8" | 118628 | 3700 lbs | 0.17 | 104.46 |
| 7/16" | 118630 | 5000 lbs | 0.22 | 131.75 |
| 1/2" | 118631 | 6400 lbs | 0.31 | 184.86 |
| 5/8" | 118632 | 10400 lbs | 0.49 | 292.72 |
| 3/4" | 118633 | 14200 lbs | 0.69 | 416.43 |
| 7/8" | 118634 | 17280 lbs | 0.96 | 578.97 |
| 1" | 118635 | 25000 lbs | 1.16 | 711.45 |
| 1-1/8" | 118636 | 33000 lbs | 1.43 | 856.64 |
| 1-1/4" | 118637 | 37500 lbs | 1.75 | 1047.76 |
| 1-1/2" | 118639 | 53000 lbs | 2.43 | 1457.77 |

Poly Plus Rope

High-tenacity 3-strand polyester with polypropylene core, medium lay, good strength/low stretch, good abrasion resistance, excellent UV resistance. White with orange tracers.



600 ft Spools

| Size | Order# | Tensile Strength | Ft Price per Reel | 600' Reel |
|--------|--------|------------------|-------------------|-----------|
| 3/8" | 118655 | 3200 lbs | 0.15 | 91.46 |
| 7/16" | 118656 | 3900 lbs | 0.18 | 118.58 |
| 1/2" | 118657 | 5400 lbs | 0.25 | 149.66 |
| 5/8" | 118658 | 7200 lbs | 0.39 | 231.61 |
| 3/4" | 118659 | 9800 lbs | 0.54 | 326.50 |
| 7/8" | 118660 | 13500 lbs | 0.76 | 455.27 |
| 1" | 118661 | 17000 lbs | 0.88 | 526.06 |
| 1-1/8" | 118662 | 21000 lbs | 1.09 | 654.11 |
| 1-1/4" | 118663 | 25000 lbs | 1.34 | 806.39 |
| 1-1/2" | 118664 | 41000 lbs | 1.89 | 1135.01 |

Electric Rope Cutting Guns

100 Watts
\$36⁴⁹

PUR-15463
Order# 127675

120 Watts
\$39⁹⁹

PUR-15463HD
Order# 735613




Anti-Fatigue Mat

2-Sided Interlocking Design, 1/2" thick, 3' x 3' mat. 100% re-vulcanized rubber.

\$14⁵⁰

SAVE
\$9⁴⁹

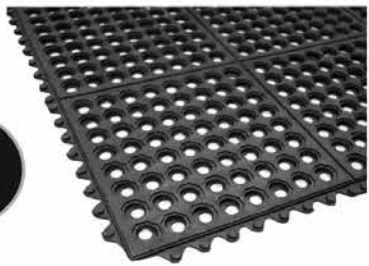

Reg 23.99

HTV-179873

Order# 754535

Fish Basket

Round, orange plastic with handles and holes for draining, approx. 1 bushel capacity.


\$19⁹⁹
EA

Orange
Order# 118243

Green
Order# 763280



**WE MARK
AND SWAGE
WIRE!**

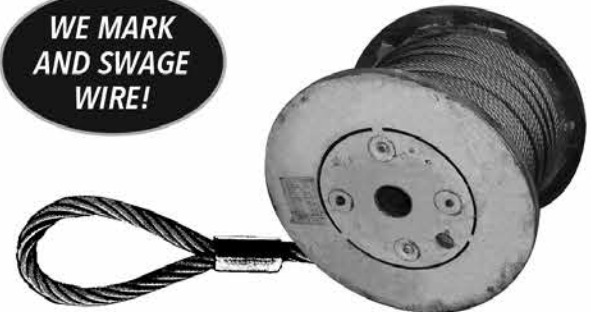

Galvanized or Stainless Steel wire, from 1/4" to 1" diameter. We hand and machine (commercial) swage wire and mark wire for fishermen the old fashioned way.

Inflatable Mooring Buoys

Polyform
U.S.

Made from high quality, durable materials. Unique vinyl valving system.
Search# POL-A

Starting At
\$28⁴⁹



GRUNDÉNS Foul Weather Gear

**HUGE
SELECTION
IN STOCK!**

Search#
GRD-



ICOM Commercial Radar

10.4" color TFT LCD display. 36NM range with 4kW output. Includes 2' radome scanner. DSC capable when connected to a DSC radio.
Also connects to AIS.

\$1999⁹⁹

ICM-MR1010R2
Order# 773501



GME ACCUSat™ EPIRBs

406 MHz. 6 Year Non-Haz Mat battery, 6 Year warranty, stainless steel antenna. USCG/GMDSS Approved.

**6 Year
Battery!**

Cat II Manual
Order# 731676
\$349⁹⁹

Cat I Auto
Order# 731678
\$469⁹⁹



KENT

Premium Adult Universal Survival Suit

High visibility yellow inflatable head pillow, face mask, mitts and ankle adjustments. Removable head pillow. Articulated arms for easier donning. Includes buddy line and whistle.

USCG APPROVED

\$249⁹⁹

KNT-1540-AU
Order# 753274



IMPERIAL

Adult Universal Cold Water Immersion Suit

Three fingered mitt. Wide legs for easy donning. Snug fitting face seal. Includes whistle and storage bag.

USCG APPROVED

\$269⁹⁹

RVS-1409A
Order# 743829



Fuel Hose Feed and Fill



SAE J1527-USCG Type A1-15
Fuel Feed line
Low perm and alcohol resistant
Search# HMM-368

SAE J1527-USCG Type A2
Fuel Fill/Vent line
Search# HMM-350



Series 250 Water/Exhaust Flex Marine Exhaust



Heavy wall with double helical wire between 4 spirals. Resists panting, collapse, heat, ozone, and exhaust fumes. Excellent flexibility and bend radius. Meets or exceeds USCG and ABYC recommendations.
For intake and exhaust.

Search# HMM-250



xtreme Control Cables

Patented Splined Core provides easy movement and minimal lost motion, CCX633 Series 4" minimum bend radius, CCX433 Series 5" minimum bend radius. Suitable for long runs, twin stations or difficult routings with multiple cable bends.

33c and 43c Series,
6'-50' lengths



PORTLAND ROCKLAND SEARSPORT SOUTHWEST HARBOR JONESPORT

Typographical errors are unintentional and subject to correction.